



## Y1 & Y2 電容器外形規格

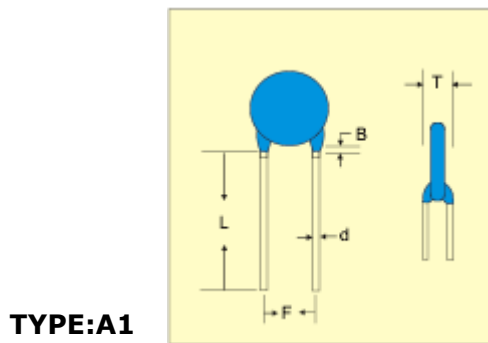

TYPE:A1



TYPE:A2

Y2	MODEL	W.V.	T m/m	d m/m	L m/m	F m/m	B m/m
	A1	AC 125V ~ 250V AC 400V	5 max	0.6 ± 0.06	5 ~ 25	7.5 ± 0.8 or 9.52 ± 0.8	3 max
	A2	AC 125V ~ 250V AC 400V	5 max	0.6 ± 0.06	5 ~ 25	7.5 ± 0.8 or 9.52 ± 0.8	4 max
Y1	MODEL	W.V.	T m/m	d m/m	L m/m	F m/m	B m/m
	A1	AC 125V ~ 250V AC 400V	8 max	0.6 ± 0.06	5 ~ 25	9.52 ± 0.8	3 max
	A2	AC 125V ~ 250V AC 400V	8 max	0.6 ± 0.06	5 ~ 25	9.52 ± 0.8	4 max

According as customer's request and size

