



TAPING (Radial)


Type A

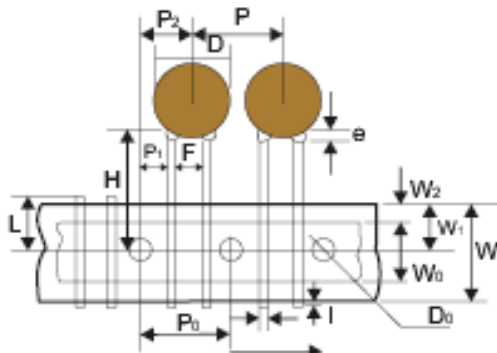

Direction of Drawing Out

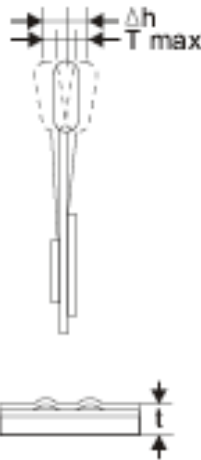


Type B

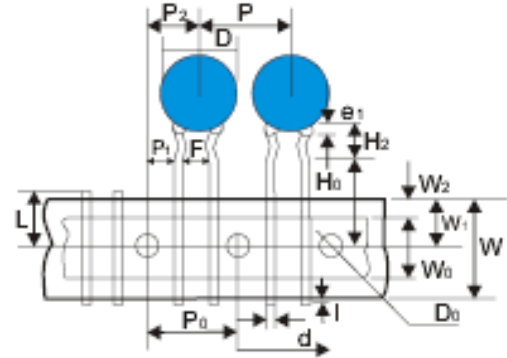

Direction of Drawing Out

Item	Code	Dimensions(mm)	Item	Code	Dimensions(mm)
Taping Pitch	P	12.7 ± 1.0	Lead Protrusion	I	+0.5 ~ 1.0
Guide Pitch	P ₀	12.7 ± 1.0	Diameter of Feed Hole	D ₀	4.0 ± 0.3
Lead Spacing	F	5.0 ± 0.8	Diameter of Lead	d	+0.06 0.6 -0.05
Feed Hold Position Capacitor Body	P ₂	6.35 ± 1.3	Total Thickness of Tape	t	0.72 ± 0.2
Feed Hold Position Capacitor Lead	P ₁	3.85 ± 0.7	Thickness of Capacitor Body	T	3.5
Diameter of Disc	D	See table of each series	Alignment to ER Direction	Δh	0 ± 2.0
			Length of Snipped Lead	L	+0 11.0 -0.1
Width of Base Tape	W	18.0 ± 0.5	Width of Hold-down Tape	W ₀	12.5
Feed Hole Vertical Position	W ₁	+0.75 9.10 -0.05	Hold-down Tape Position	W ₂	1.5 ± 1.5
Taping Height	For Straight	H ₀	Coating Extension	e	1.5
	For Crimp	H	+1.5 20 -1.0	Coating Extension	e1


■ AMMO PACK



H=24 ±5mm
L=332±5mm
W=42±3mm

Acceptable to standard radial type cartridge

■ REEL



D ≤ 354
(13.93)
B ≤ 21
(.83") but
≤ 30
(1.18")
W ≤ 55
(2.16)

Acceptable to standard radial type cartridge with a few extra accessories. Reeled axials also acceptable to standard axial type cartridge with a few accessories.